


DuoView Camera

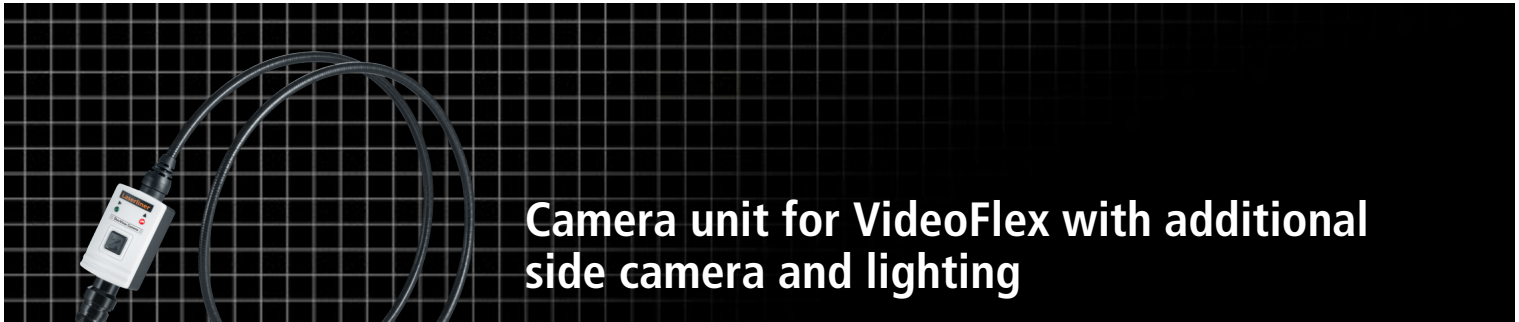

Camera unit for VideoFlex with additional side camera and lighting

- Camera unit for VideoFlex
- Front and side camera for quick change of view at the touch of a button
- 4 high-performance, high-intensity LEDs on the front camera for powerful object lighting and 2 LEDs on the side camera
- For inspecting highly inaccessible locations such as cavities, shafts, masonry or in vehicles
- Waterproof camera head and cable
- Compatible with G3/G4

TECHNICAL SPECIFICATIONS

CAMERA TYPE	CMOS image sensor
CAMERA HEAD	ø 9 mm
CAMERA HEAD PROTECTION CLASS	water-resistant, IP 67
CAMERA HEAD LEDS	Front: 4 / Side: 2
CAMERA RESOLUTION	640 x 480 pixels
FIELD OF VIEW (FOV)	57°
CAMERA FOCUS	Front: F3 cm - F5 cm / Side: F1 cm - F5 cm
CABLE DIAMETER	6 mm
LENGTH OF FLEX CABLE	1 m
MINIMUM BENDING RADIUS	50 mm
OPERATING CONDITIONS	0°C ... 60°C, max. humidity 20 ... 90% rH, no condensation, max. working altitude 4000 m above sea level
STORAGE CONDITIONS	-20°C ... 80°C, max. humidity 80% rH
DIMENSIONS (W X H X D)	1100 mm x 30 mm x 24 mm
WEIGHT	144 g

