




Laserliner®

AQuaMaster 120



Robust rotary laser with automatic horizontal self-levelling and numerous additional functions.

Rev. 0109

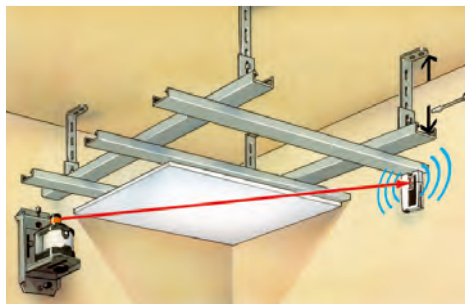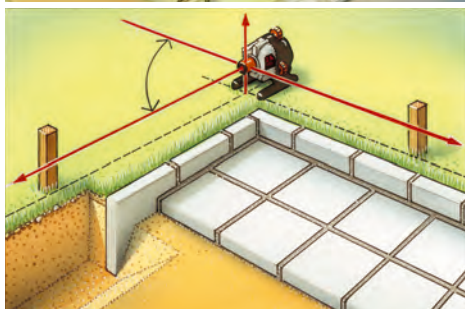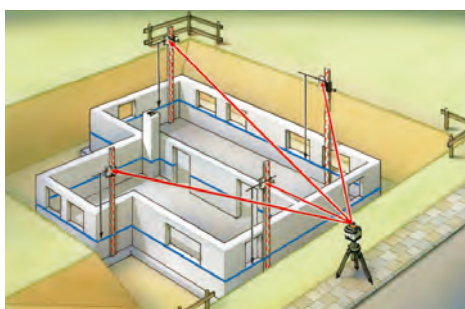

- **Automatic level:** Automatic rotary laser with horizontal self-levelling by means of magnetically damped pendulum system; vertical alignment with adjustable foot.
- **90° angle function:** The laser beam can be moved in 90° increments – ideal for measuring plots of land.
- A **vertical reference beam** is provided to plumb and align partition walls.
- **Tilt function:** The unit uses visual and audible signals to indicate when it is outside its tolerance range.
- **Slanting levels** can be set using the tilt function, which can be switched off.
- The **wall/floor console** can be vertically levelled or the unit can be attached to the wall.
- The **SensoCommander 120** features LEDs on the front and rear sides, as well as an adhesion magnet.
- All of the rotary laser's functions can be **controlled remotely** using the SensoCommander.
- The **SpotLite marking** function prevents parallax errors.
- **Transport lock:** A pendulum lock protects unit during transport.
- **Simple, uniform operating techniques.**

TECHNICAL DATA

ACCURACY 2 mm / 10 m
SELF-LEVELLING RANGE ± 3,5°
LEVELLING Automatic horizontal / vertical with adjustable foot
LASER RECEPTION RANGE max. 120 m radius
LASER WAVELENGTH 635 nm
LASER class 2, < 1 mW
POWER SUPPLY alkaline batteries for 90 hours
WATER AND DUST PROTECTION IP 54
WEIGHT 1,7 kg
DIMENSIONS 160 x 200 x 200 (W x H x D)




Article-No: 029.03.00A

EAN-Code: 4 021563 658404

AQuaMaster 120
including carrying case
+ SensoCommander 120
+ universal mount
+ wall/floor console
+ battery compartment
+ batteries


PU 1

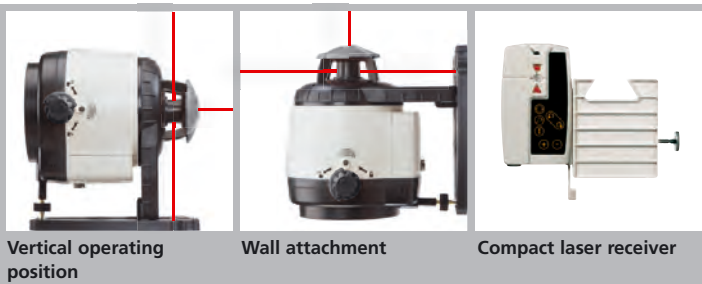

Vertical operating position

Wall attachment

Compact laser receiver

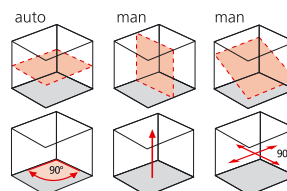

OPTIONAL ACCESSORIES

ARTICLE	ARTICLE NO	EAN-CODE	PU
Flexi Levelling Staff 240 cm	080.50	4 011879 631147	1
Crank Tripod 160 cm	080.30	4 011879 630959	1